

描述

- 产品尺寸：320 x 130 x 72mm
- 金属结构，以后缀标识区分不同表面处理工艺
- G1/2 连接
- 恒温阀设计，带三功能手持花洒

操作

- 旋钮式手柄
- 温度控制旋钮的调节范围为237度，顺时针旋转至极限位置时为最冷，逆时针旋转至极限位置时为最热。
- 安全限制温度为 38℃
- 出厂设定温度范围为 20℃ 至 49℃

流量

- 0.1MPa 时流量：浴缸水龙头最低为 6.5L/min，带软管和手持淋浴器流量为 4.0 L/min 至 9.0 L/min。

阀芯


- 恒温阀芯采用非金属/有色金属材料设计

执行标准

- 符合QB/T 2806

质保期

- 5年有限保修，涵盖漏水和滴水问题

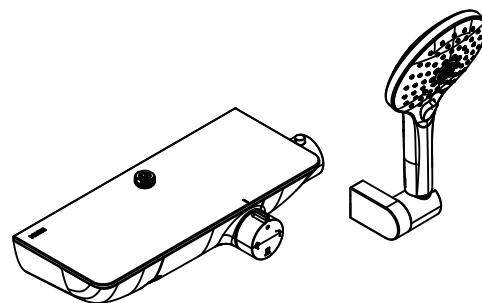




多伦多

三功能置物平台恒温浴缸龙头

型号: 68234BLG
68234MCL01

注意: 与MOEN 70334B淋浴杆匹配

单位: mm

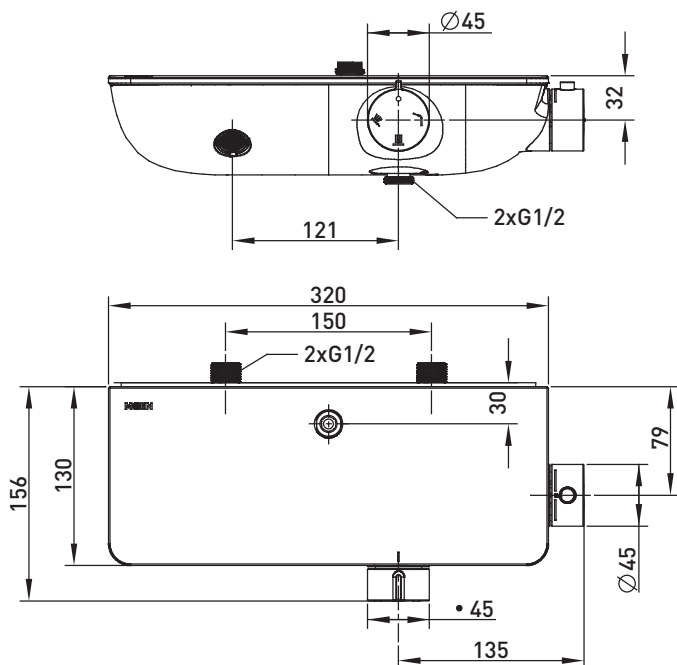

DESCRIPTION

- Product Dimensions: 320 x 130 x 72mm
- Metal construction with various finishes identified by suffixes
- G1/2 connections
- Thermostatic valve design and with 3F hand shower

OPERATION

- Knob Style handle
- Temperature handle operates through a 237° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 38°C
- Factory established temperature range from 20°C to 49 °C

FLOW

- Flowrate at 0.1Mpa is 6.5L/min minimum in tub spout, about 4.0 L/min to 9.0 L/min with hose and handheld shower.

CARTRIDGE


- Thermostatic cartridge design with Nonmetallic/no-ferrous material

STANDARDS

- Designed to meet QB/T 2806

WARRANTY

- 5 years limited warranty against leaks and drips

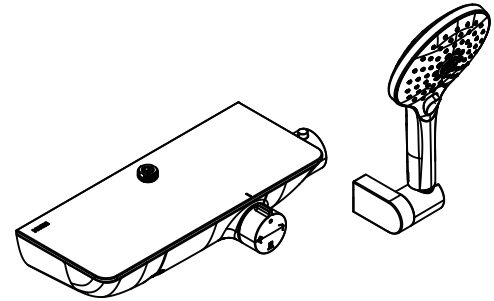

TORONTO

WM SHELF FAUCET DIRECT CONNECT

MODELS: 68234BLG
68234MCL01

NOTES: Match with MOEN 70334B SHOWER BAR

Units : mm

