

DESCRIPTION

- Metal construction with a chrome finish
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses

OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

FLOW

- Flowrate is about 7.3L/min at 0.3Mpa with aerator
- Flowrate is about 4.5L/min at 0.1Mpa with aerator

CARTRIDGE


- MOEN Duralast cartridge

STANDARD

- Designed to meet GB 18145

WARRANTY

- 5years limited warranty against leaks and drips



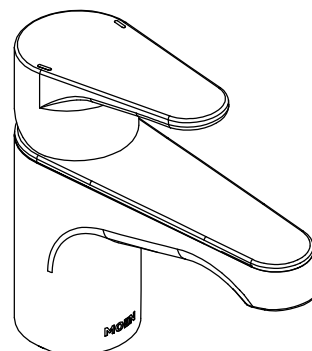


CARLOW

Single Mount Single-Handle Lavatory Faucet

Models: 55121

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX. DIA. HOLE

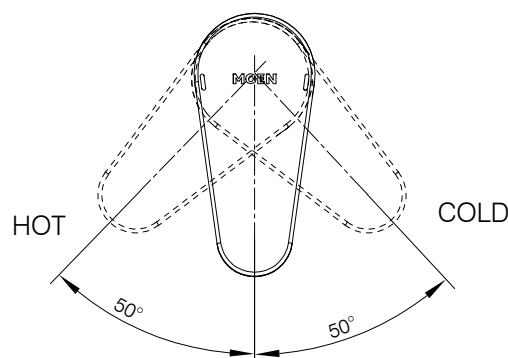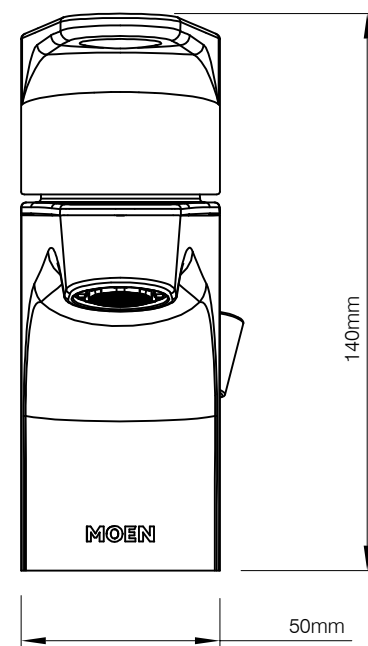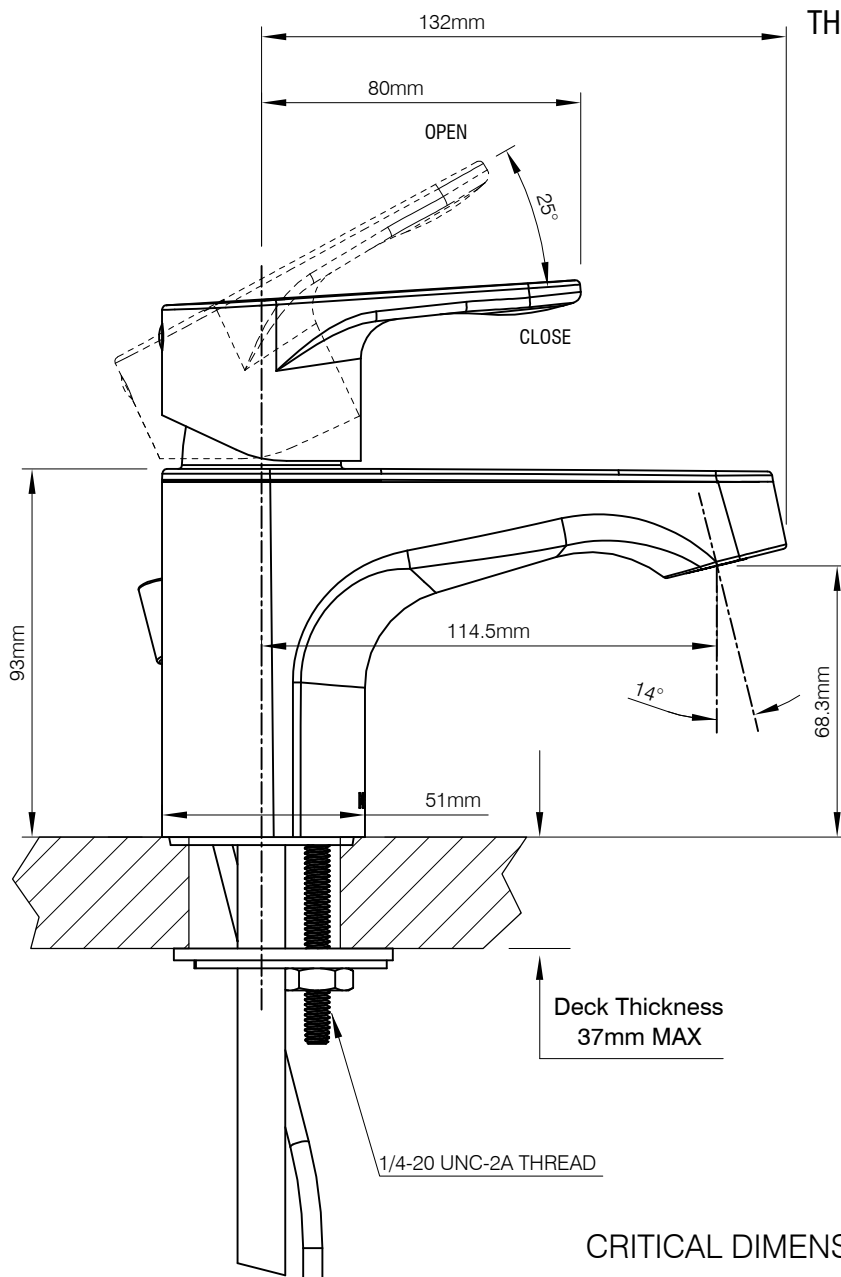

CRITICAL DIMENSION

(DO NOT SCALE)